

ISO 711 · Rigid shielding panel

Allows a viewing area to be retained within a shielded element: door, partition or enclosure.

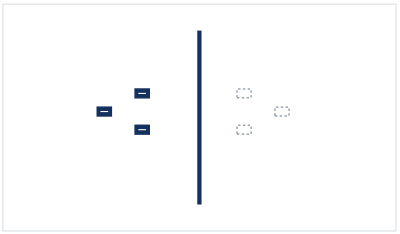

tag read tag not read

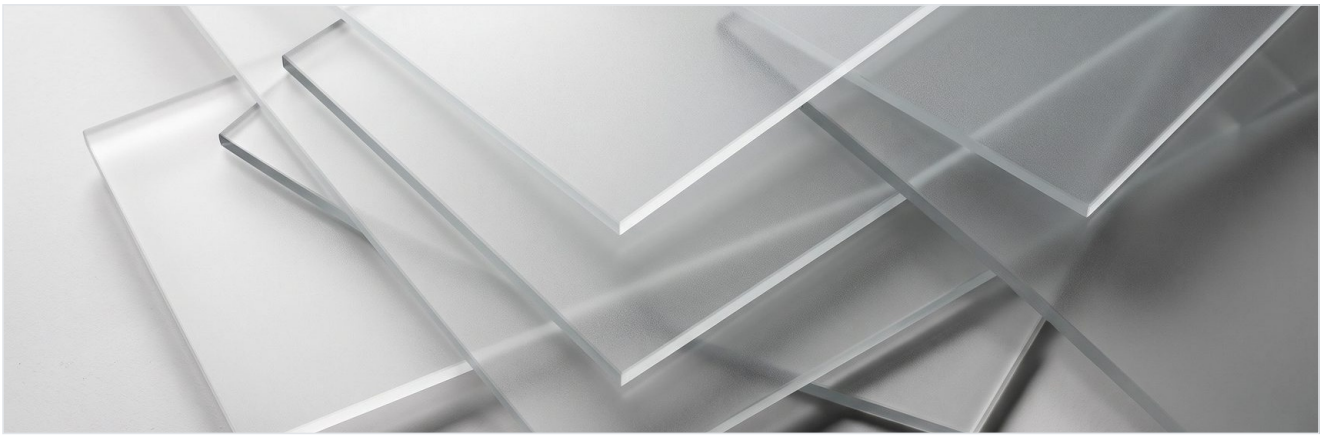

Description

Panel incorporating ISO 325 film between two rigid PVC sheets. It provides the mechanical strength required for the viewing area and is cut to the dimensions of the project.

Applications

Viewing areas in shielded doors and partitions · inspection windows and windows in reading cabinets or enclosures · integration into reading stations.

Characteristics

- Thickness: 2 to 4 mm
- REACH and RoHS compliant
- Storage: 24 months, 6 to 34 °C, RH ≤ 65 %

RF performance

9.4 to 15.5 dB at 863 and 915 MHz.
47 dB at 13.56 MHz in magnetic field.
Measurements carried out by the Emitech laboratory on the ISO 325 film.

Transparency entails a lower level of attenuation than opaque solutions, and effectiveness in situ depends on the read configuration.